



Creative LED Cube Sign
Four / Five Sides

MAGIC CUBE LED DISPLAY



LOUIS VUITTON



640x640x640mm



HD performance for both effects and dynamic video show.

480x480x480mm



320x320x320mm






No need frame for installation, no professional installation required.

384×384mm SCREEN SIZE	P3 HIGH-RESOLUTION	≥5000 BRIGHTNESS	WIFI CONTROLLER
---------------------------------	------------------------------	----------------------------	---------------------------

576×576mm SCREEN SIZE	P3 HIGH-RESOLUTION	≥5000 BRIGHTNESS	WIFI CONTROLLER
---------------------------------	------------------------------	----------------------------	---------------------------

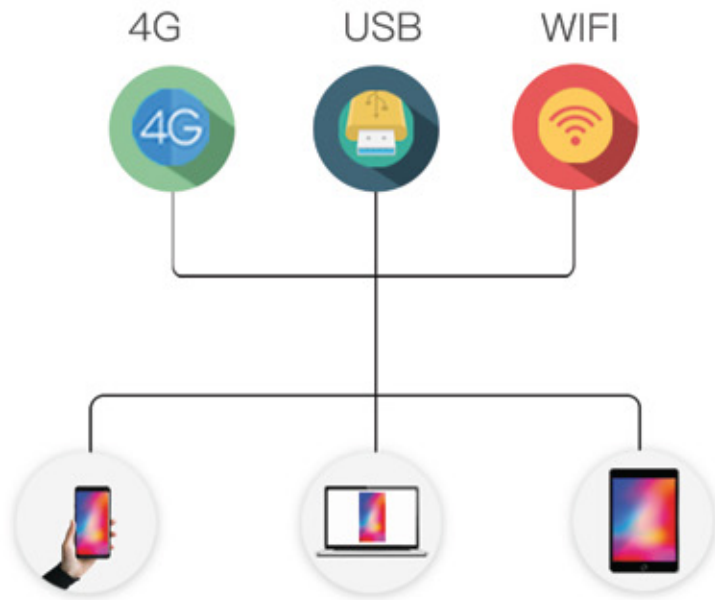

Even the end-user can easily to operate the LED cube screen via computer or mobile phone APP.


Plug and play device.



Standing ▾



Hanging ▲

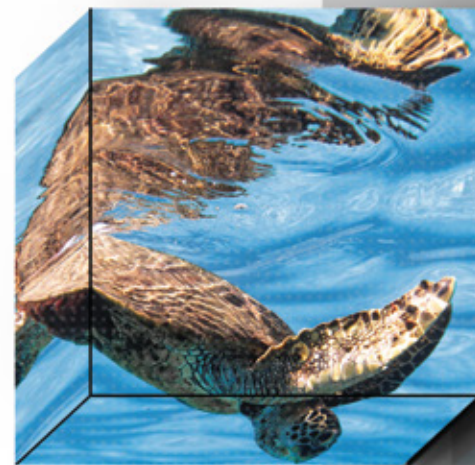

Wall-Mounted ▲

It is commonly used for **Chain store**,
airport, exhibition, hotel or for
3D digital show in clubs, shows, etc.



Type	Outdoor Magic Cube LED display			
Model:	LC303	LC203	LC204	LC206
Pixel Pitch	P3	P3	2.5mm	2.5mm
Pixel Configuration	SMD 1921	SMD 1921	SMD 1415	SMD 1415
Pixel Density	111,111 pixels/m ²	111,111 pixels/m ²	160,000 pixels/m ²	160,000 pixels/m ²
Scan Method	1/16 Scan	1/16 Scan	1/16 Scan	1/16 Scan
Module Dimensions (W × H)	192*192mm	192*192mm	160*160mm	160*160mm
Module resolution	64*64 dots	64*64 dots	64*64 dots	64*64 dots
Screen size	384 × 384mm / side	576 × 576mm / side	480 × 480mm / side	640 × 640mm / side
Screen resolution	128*128 dots	192*192 dots	192*192 dots	256*256 dots
Module quantity	4 pcs / side	9 pcs / side	9 pcs / side	16 pcs / side
Screen design	5 sided / 4 sided (optional)	5 sided / 4 sided (optional)	5 sided / 4 sided (optional)	5 sided / 4 sided (optional)
Case Material	Steel / Aluminum	Steel / Aluminum	Steel / Aluminum	Steel / Aluminum
Weight	23kg/ set	32kg/ set	25kg/ set	40kg/ set
Colours	281 trillion	281 trillion	281 trillion	281 trillion
Contrast Ratio	2,000 : 1	2,000 : 1	2,000 : 1	2,000 : 1
Average Power Consumption	200W / set	300W / set	240W / set	360W / set
Max Power Consumption	600W / set	800W / set	800W / set	1200W / set
Brightness	≥5000 nits	≥5000 nits	≥5500 nits	≥5500 nits
Refresh Rate	>1,920 Hz	>1,920 Hz	>1,920 Hz	>1,920 Hz
Horizontal Viewing Angle	140°	140°	140°	140°
Vertical Viewing angle	140°	140°	140°	140°
Expected Lifetime	100, 000 Hrs	100, 000 Hrs	100, 000 Hrs	100, 000 Hrs
Operating Temp/Humidity	-20°C-50°C / 10%-90%	-20°C-50°C / 10%-90%	-20°C-50°C / 10%-90%	-20°C-50°C / 10%-90%
Servicing	Rear	Rear	Rear	Rear
IP Rating	IP 65	IP 65	IP 65	IP 65
Application environment	Indoor & outdoor	Indoor & outdoor	Indoor & outdoor	Indoor & outdoor
Control method	USB/WIFI /4G (optional)	USB/WIFI /4G (optional)	USB/WIFI /4G (optional)	USB/WIFI /4G (optional)
Accessories	Wall mounted kit	Wall mounted kit	Wall mounted kit	Wall mounted kit
Package:	Honey box	Honey box	Honey box	Honey box + wooden box

Type	Indoor Magic Cube LED display		
Model:	LC213	LC214	LC216
Pixel Pitch	2.5mm	2.5mm	2.5mm
Pixel Configuration	SMD 2121	SMD 2121	SMD 2121
Pixel Density	160,000 pixels/m ²	160,000 pixels/m ²	160,000 pixels/m ²
Scan Method	1/32 Scan	1/32 Scan	1/32 Scan
Module Dimensions (W × H)	160*160mm	160*160mm	160*160mm
Module resolution	64*64 dots	64*64 dots	64*64 dots
Screen size	320 × 320mm / side	480 × 480mm / side	640 × 640mm / side
Screen resolution	128*128 dots	192*192 dots	256*256 dots
Module quantity	4 pcs / side	9 pcs / side	16 pcs / side
Screen design	5 sided / 4 sided (optional)	5 sided / 4 sided (optional)	5 sided / 4 sided (optional)
Case Material	Steel / Aluminum	Steel / Aluminum	Steel / Aluminum
Weight	13kg/ set	22kg/ set	36kg/ set
Colours	281 trillion	281 trillion	281 trillion
Contrast Ratio	2,000 : 1	2,000 : 1	2,000 : 1
Average Power Consumption	100W / set	160W / set	250W / set
Max Power Consumption	350W / set	550W / set	810W / set
Brightness	≥800 nits	≥800 nits	≥800 nits
Refresh Rate	>1,920 Hz	>1,920 Hz	>1,920 Hz
Horizontal Viewing Angle	140°	140°	140°
Vertical Viewing angle	140°	140°	140°
Expected Lifetime	100, 000 Hrs	100, 000 Hrs	100, 000 Hrs
Operating Temp/Humidity	-20°C-50°C / 10%-90%	-20°C-50°C / 10%-90%	-20°C-50°C / 10%-90%
Servicing	Rear/ Front (optional)	Rear/ Front (optional)	Rear/ Front (optional)
IP Rating	IP 33	IP 33	IP 33
Application environment	Indoor & outdoor	Indoor & outdoor	Indoor & outdoor
Control method	USB/WIFI /4G (optional)	USB/WIFI /4G (optional)	USB/WIFI /4G (optional)
Accessories	Wall mounted kit/ Hanging bar	Wall mounted kit/ Hanging bar	Wall mounted kit/ Hanging bar
Package:	Honey box	Honey box	Honey box + wooden box